COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

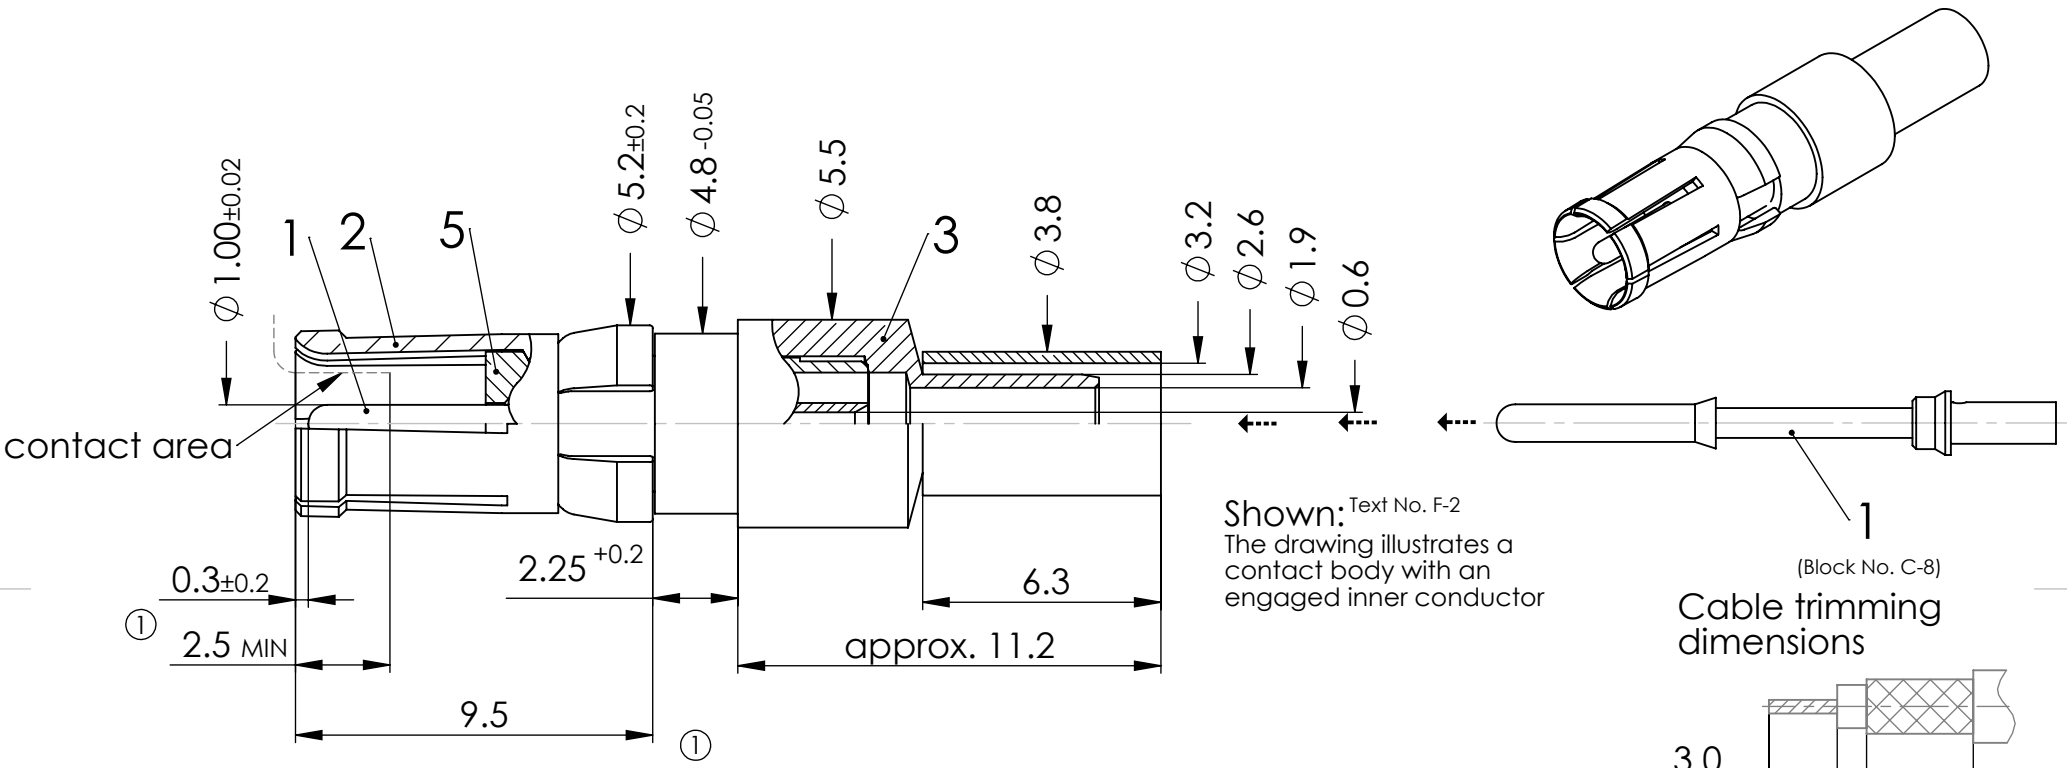

Shown: Text No. F-2
The drawing illustrates a contact body with an engaged inner conductor

(Block No. C-8)

Cable trimming dimensions

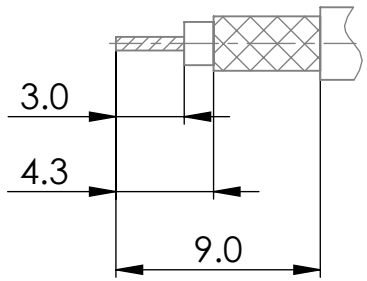

Text No. W-1

FCT tools:

Crimping of inner conductor:

Hand tool: M22520/2-01
Locator: K1003

Pneumatic crimp tool: WA22
Locator: K1003

Cable:
AWG 24 / SEL. 5
AWG 26 / SEL. 5
AWG 28 / SEL. 4
AWG 30 / SEL. 3

Text No. W-2

FCT tools:

Crimping of outer conductor:

Hand tool: M22520/5-01
Die: Y1535P cavity B

Pneumatic crimp tool: HX23
(replacement for PH4001) ②

Extraction tool: DRK38

IMPEDANCE 50 Ohm			*COAXIAL CONTACT*	SCALE 5:1	CABLE
FOR D-SUB				NAME / DATE	
DIMENSIONS IN MM			DRAWN	ffuhrmann 31-07-2006	DATA SHEET
MATERIAL + FINISH SEE EXTRA SHEET			CHECKED	MTeubel 12-10-2012	
UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR REFERENCE ONLY			FCT a molex company		PART NO. FMS001S / REV. 2
2	12-10-2012	23305			
REV.	DATE	INDEX	ORIGINAL: DIN A4-DRAWING AS A FILE		REPLACEMENT FOR: / PAGE: 1/1