
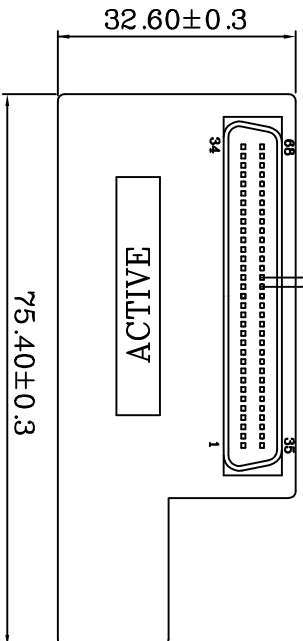
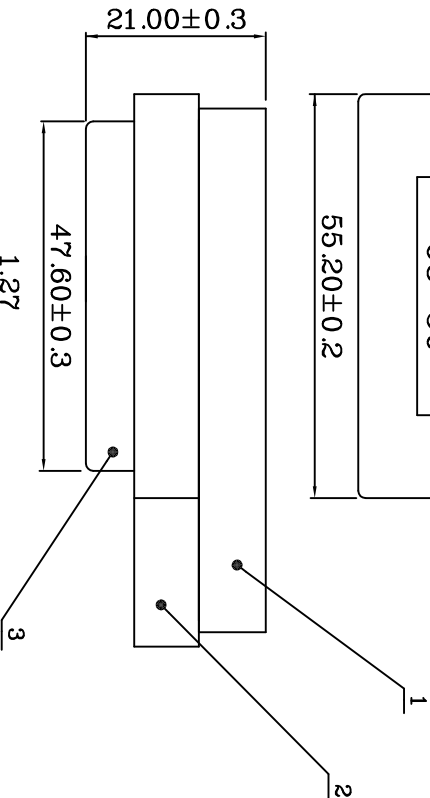



FCP50S

71.15±0.3

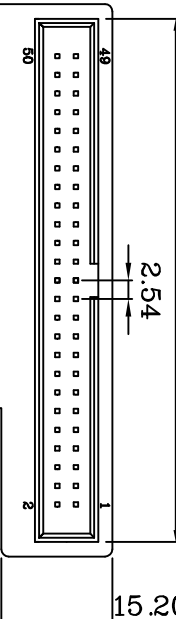

REMARK:

1. IDC50PIN FEMALE
2. ASSEMBLY HOOD
3. HPD68PIN FEMALE PLASTIC

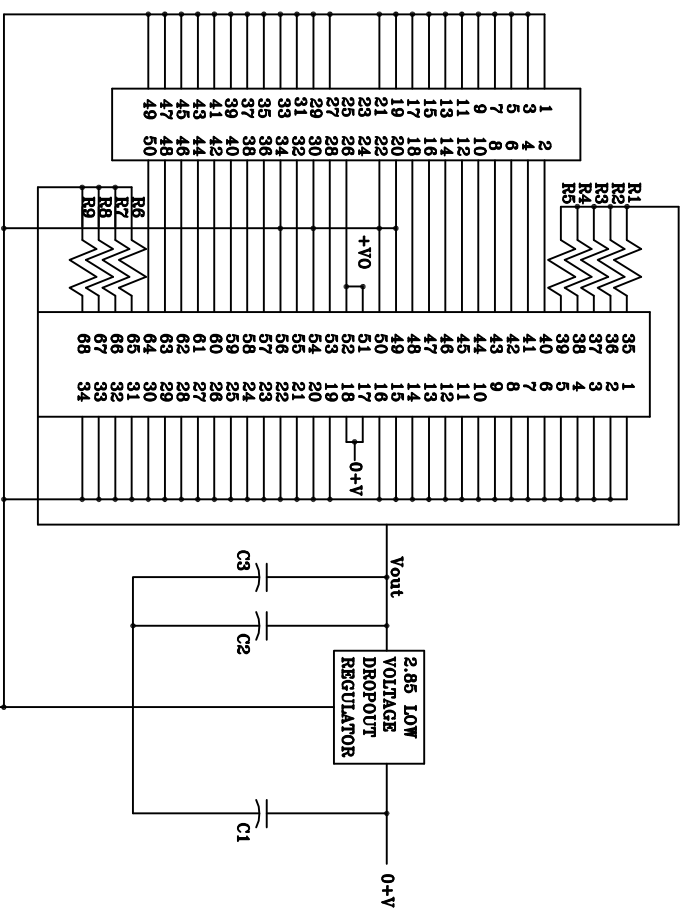

R1 - R9=110Ω ±2%
 C1=4.7µF/16V ±20% TAN.CAP
 C2=22µF/16V ±20% TAN.CAP
 C3=0.1µF/50V +80% CER.CAP
 REG. Output=2.85V ± 1%

• 100% TEST

Assmann Electronic GmbH

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.	±5
°	±0.5
mm	±0.3
.00	±0.2

SCALE: 1:1 UNIT: mm

DRAWN: MICHAEL 12/23/99

CHECKED: / /

PRODUCT NO. AB 845 TERM
 FILE NAME: S68A14-R

REV.	A	S68A14-R	UPPER BYTE ACTIVE TERMINATOR	HPD68PIN FEMALE TO IDC50PIN FEMALE ACTIVE RIGHT ANGLE	12/23/99	DATE	APPROVED	SIZE	REV.	FILE NAME
								A4	A	S68A14-R