


RECOMMENDED PANEL CUTOUT

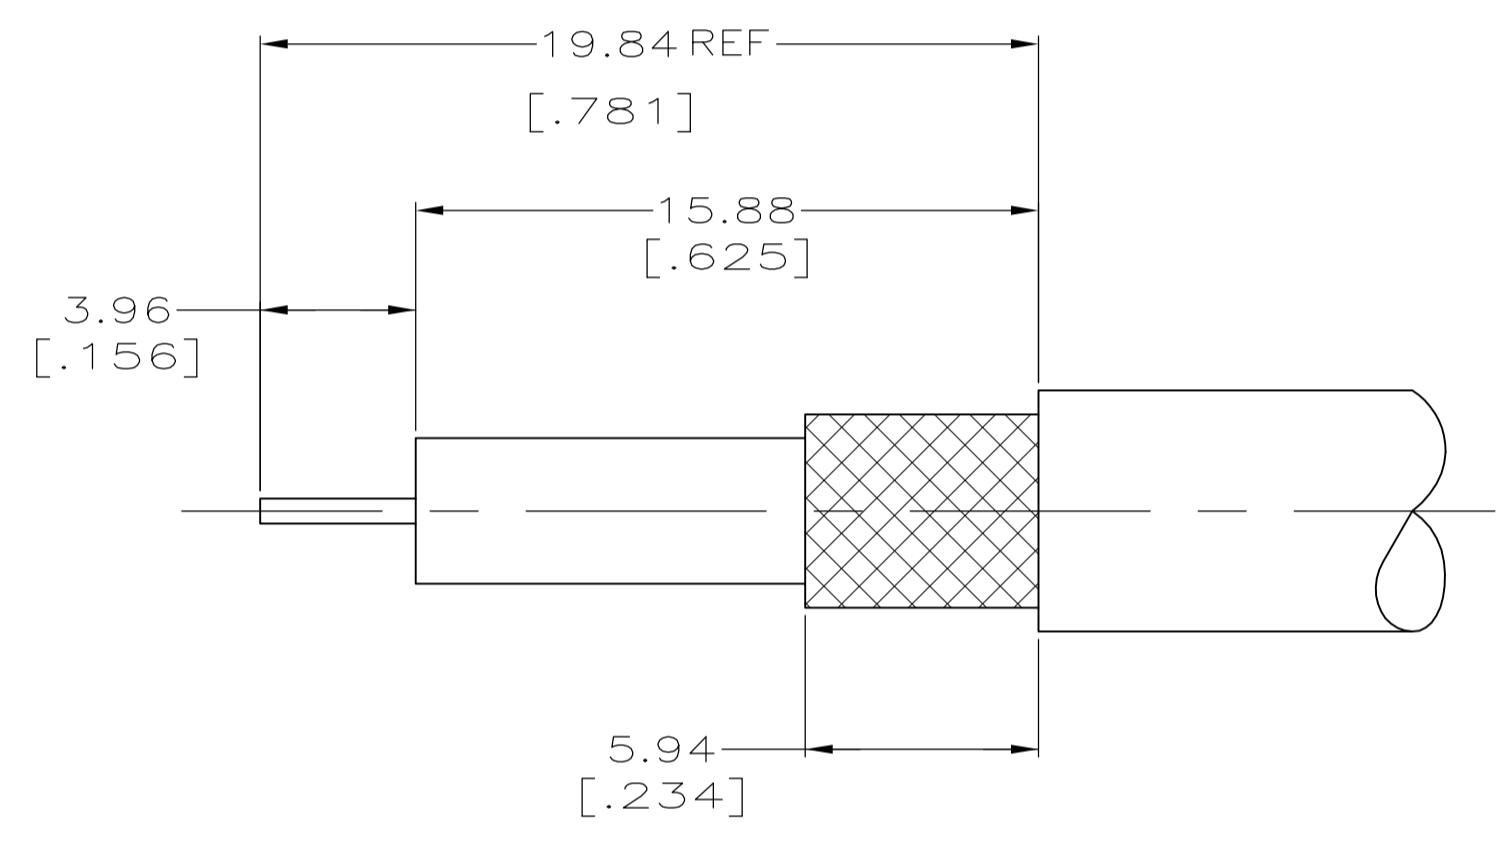

RECOMMENDED STRIP LENGTH

- 1 MAX PANEL THICKNESS .240.
- 2 USE WITH PRO-CRIMPER 354940-1.
- 3. USE INSTRUCTION SHEET 408-9763.
- 4 BULK KIT PACKAGE, 100 PER BAG.

4	CUSTOM CABLE	-	-	-	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-2	1-413746-0	413744-2	2-5413590-1
	AT&T 735A	4.52 [.178]	1.07 [.042]	58425-2	-	-	329633	1-329631-2	1-329632-2	9-413658-2	1-413746-0	413744-2	1-5413590-8
	CUSTOM CABLE, C/C-24AWG, DOD-.109, JOD-.153	4.52 [.178]	1.07 [.042]	58425-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	413746-5	413744-2	1-5413590-7
	RG-179/U & 187/U	4.52 [.178]	1.07 [.042]	58425-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-0	1-413746-5	413744-2	5413590-8
	AT&T KS 19224 L2 AND JIS 1.5C-XV	4.52 [.178]	1.07 [.042]	58425-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-2	1-413746-5	413744-2	5413590-4
	BELDEN 8218 AND JIS 2.5C-2V	4.52 [.178]	1.07 [.042]	58425-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	1-413746-0	413744-2	5413590-3
	FOR USE WITH CABLE	FERRULE (HEX)	CONTACT (SQ)	DIE SET	8 TUBING, METAL QTY=1	7 TUBING, PLASTIC QTY=1	6 GASKET QTY=1	5 JAM NUT QTY=1	4 LOCKWASHER QTY=1	3 FERRULE QTY=1	2 CONTACT QTY=1	1 JACK ASSY QTY=1	PART NUMBER
		CRIMP HEIGHTS											

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN L VARELA - 22APR2005	STE	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J. HAVENER		
2 PLC ± 0.41 [016]	3 PLC ± -	APP'D J. LIPPERT		
4 PLC ± -	ANGLES ± -	PRODUCT SPEC		
MATERIAL	FINISH	APPLICATION SPEC		
		WEIGHT		
		SIZE		
		CAGE CODE		
		DRAWING NO		
		RESTRICTED TO		
		SCALE	5:1	
		SHEET	1 of 1	
		REV	A1	

CUSTOMER DRAWING