


PIN ASSIGNMENT	
P1	P2
1 RED	1
2 WHITE	2
3 SPIRAL	3

- Electrical test:**
- 100% short, open, miswire test
  - Conduct resistance: 2 ohm(max)
  - Insulation resistance: 1Mohm(min)
  - Dielectric test: DC 300V/10ms

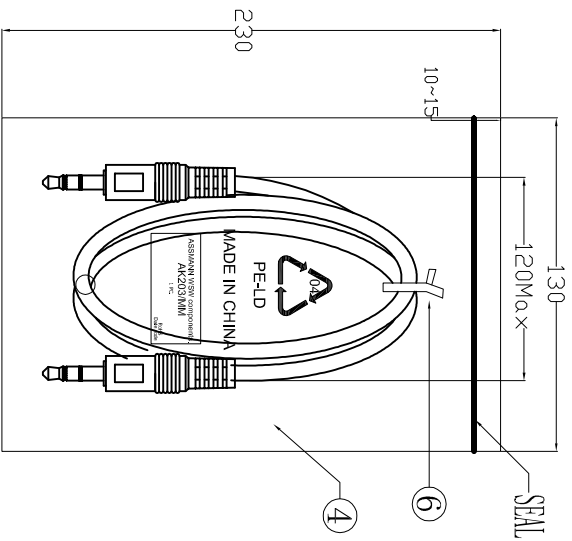

⑥	TIE	1	BLACK L=80mm
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*L15mm.
④	PE BAG	1	CLEAR SIZE:100*200*0.05mm PRINT BLACK"MADE IN CHINA".
③	OUT JACKET	5.5g	OUTER MODEL PVC 45P COLOR BLACK
②	CONN	2	3.5ST MALE Troy6.0mm L=30mm MOLD TYPE NI-PLATED INSULATOR COLOR:BLACK
①	CABLE	1	NOUL 28AWG(7/0.12 TC)*2C(RED,WHITE)+S(43/0.12 TC) JACKET BLACK OD:3.0MM

SPECIFICATION

1PCS/PE BAG

**RoHS compliant**

Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017 Amy
		Approved	20.02.2017 Amy
		ASSMANN WSW-No. AK203/MM	
DIM TOL		Drawing-No. ASS 7886 CA	
		Replace Sheet	
Angle TOL		Drawing-No. rev00	
		Sheet	
Id.		ASSMANN WSW components	
Modification			

1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B
H	G	F	E	D	C	B