

THIN SMD LOW FREQUENCY CRYSTAL UNIT


FC-135/145

Product number (please refer to page 1)

Q13FC135xx xx x 00

Q13FC145xx xx x 00

- High-density mounting-type SMD of 0.9 mm Max. thickness.
- Small packaging area and light weight.
- Excellent environmental capability.
- Most suitable for small communications devices.

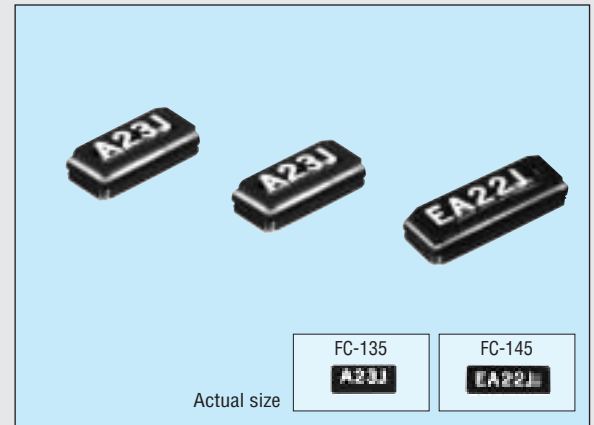


Specifications (characteristics)

Item	Symbol	Specifications	Remarks	
Nominal frequency	f	32.768 kHz	please contact us for inquiries about the available frequency	
Temperature range	Storage temperature	T _{STG}	-55 °C to +125 °C	Stored as bare product after unpacking
	Operating temperature	T _{OPR}	-40 °C to +85 °C	
Maximum drive level	GL	0.5 μW Max.		
Recommended drive level	DL	0.1 μW		
Frequency tolerance(standard)	Δf/f	±20 x 10 ⁻⁶	T _a =+25 °C, DL=0.1 μW Please ask tighter tolerance	
Peak temperature(frequency)	θT	+25 °C ±5 °C		
Temperature coefficient(frequency)	a	-0.04 x 10 ⁻⁶ /°C ² Max.		
Load capacitance	C _L	9.0 pF, 12.5 pF	Please specify	
Series resistance	R ₁	70 kΩ Max.		
Motional capacitance	C ₁	1.7 fF Typ.		
Shunt capacitance	C ₀	1.3 pF Typ.		
Insulation resistance	IR	500 MΩ Min.		
Aging	fa	±3 x 10 ⁻⁶ /year Max.	T _a =+25 °C ±3 °C, first year	
Shock resistance	S.R.	±8 x 10 ⁻⁶ Max.	100 g dummy (Seiko Epson Standard) drop from 1500 mm height on to the concrete 3 directions 10 times.	

External dimensions

(Unit: mm)

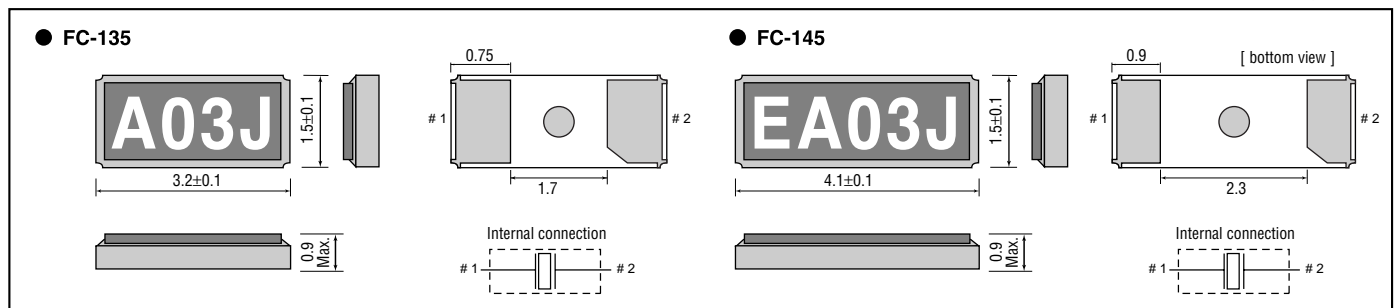

Recommended soldering pattern

(Unit: mm)

