


5

4

3

2

1

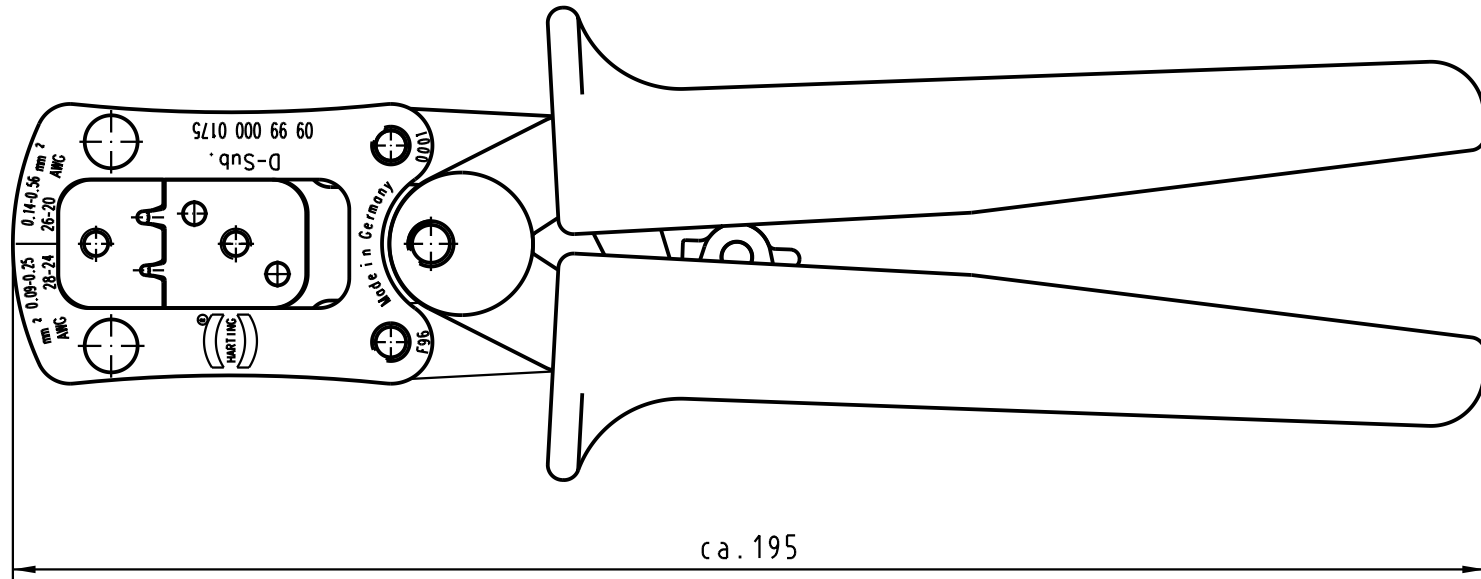

Linearer Hub  
*Straight action principle*



Entriegelbare Zwangssperre  
*Ratchet release*

Präzise geschliffene Profile  
*Precisely ground profiles*

Modernste ergonomisch gestylte Softhandgriffe  
Farbe: SIGNALGELB (RAL 1003)  
*Ergonomic soft grips, colour: yellow (RAL 1003)*

Anwendungsbereich: D-SUB Kontakte  
*Application range: D-SUB contacts*

Leiterquerschnitt: Profil 1 AWG 28-24 / Profil 2 AWG 26-20  
*Cross section range:*

 All Dimensions in mm Original Size DIN A 4		Techn. Character.			Nicht tolerierte Maße/Free size tolerances	
Mod.	Dat.	Name	Dat.	Name	Maßstab/Scale  1:1	Crimpzange D-Sub für Einzelkont. <i>Crimp Tool D-Sub for Single cont.</i>
			Detail.	09.10.01 Hage		
			Insp.	09.10.01 Wae		
			Stand.			
29856			HARTING Electronics GmbH & Co. KG			TB 09 99 000 0175
			D-32339 ESPELKAMP			
					Sub.	

D

C

B

A