

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				

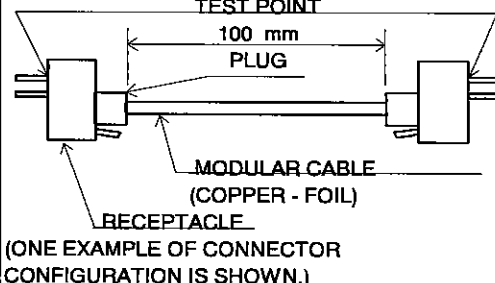
<b>APPLICABLE STANDARD</b>			
<b>RATING</b>	OPERATING TEMPERATURE RANGE	-25 °C TO 80 °C	STORAGE TEMPERATURE RANGE °C TO °C
	VOLTAGE	125 V AC	CURRENT 500 mA

**SPECIFICATIONS**

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
------	-------------	--------------	----	----

<b>CONSTRUCTION</b>				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	<input type="radio"/>	<input type="radio"/>
MARKING	CONFIRMED VISUALLY.		<input type="radio"/>	<input type="radio"/>

**ELECTRIC CHARACTERISTICS**

CONTACT RESISTANCE	100 mA (DC OR 1000 Hz AC). MEASUREMENT POINTS SHALL BE AS FOLLOWS. 	230 mΩ MAX.	<input type="radio"/>	<input type="radio"/>
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.	<input type="radio"/>	<input type="radio"/>
VOLTAGE PROOF	500 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	<input type="radio"/>	<input type="radio"/>

**MECHANICAL CHARACTERISTICS**

MECHANICAL OPERATION	200 TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: 250 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	<input type="radio"/>	<input type="radio"/>
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, $m/s^2$ AT 2 h, FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 5 μs.	<input type="radio"/>	<input type="radio"/>
SHOCK	490 m/s <sup>2</sup> DIRECTIONS OF PULSE 11 ms AT 3 TIME FOR 3 DIRECTION.	② CONTACT RESISTANCE: 250 mΩ MAX. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	<input type="radio"/>	<input type="radio"/>

**ENVIRONMENTAL CHARACTERISTICS**

DAMP HEAT (STEADY STATE)	EXPOSED AT 40 °C, 90 TO 95 %, 500 h.	① CONTACT RESISTANCE: 250 mΩ MAX. ② INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY) ③ INSULATION RESISTANCE: 10 MΩ MIN. (AT DRY) ④ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	<input type="radio"/>	<input type="radio"/>
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → 5 TO 35 → 85 → 5 TO 35°C TIME 30 → 10 TO 15 → 30 → 10 TO 15 min UNDER 5 CYCLES.	① CONTACT RESISTANCE: 250 mΩ MAX. ② INSULATION RESISTANCE: 100 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	<input type="radio"/>	<input type="radio"/>
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE: 250 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	<input type="radio"/>	<input type="radio"/>

REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		<i>J. Watanabe</i>	<i>J. Watanabe</i>	<i>H. Miura</i>	<i>H. Miura</i>
Unless otherwise specified, refer to JIS C 5402.	'96.11.26	'96.11.26	96.11.27	96.11.27	

Note QT:Qualification Test AT:Assurance Test ○:Applicable Test		<b>HIROSE ELECTRIC CO., LTD.</b>		<b>SPECIFICATION SHEET</b>		PART NO. TM11AP - 88P	
CODE NO.(OLD) CL	DRAWING NO. ELC4 - 120679	CODE NO. CL 222 - 2780 - 6	1/1				

TO  
Q 2