

NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
4. NO CONTACTS ON POS. A1 + A2
5. METAL BRACKETS: STEEL; min. 320µm TIN over 80µm NICKEL
6. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 3043W2SAT99N20X CONEC ABC


Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			
DO NOT ALTER CAD DRAWING BY HAND			
rev.	description	date	name

tolerance	dim. in mm
date	name
drawn	23.06.10 Schmidt
appd.	23.06.10 Koch
norm	
d-old	
CONEC	

scale:	2:1 (5:1)	
material:	see notes	
title:	D-SUB COM. FEMALE 90° 43W2S with threaded insert and metal bracket	
dwg no:	Inventor 10	DIN-A3
	13K2A2298	sh: 1
part no:	3043W2SAT99N20X	

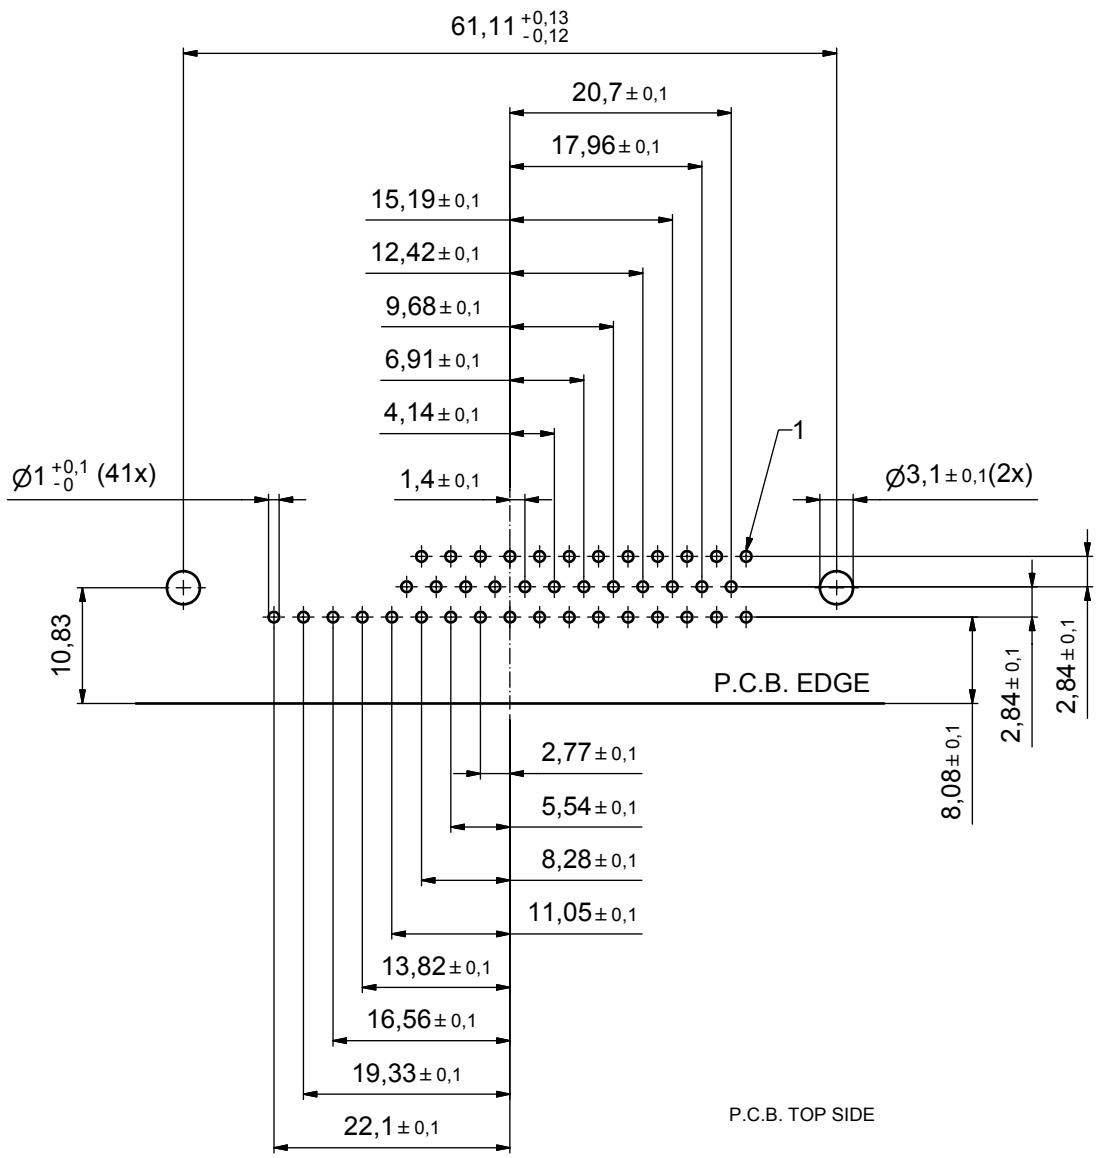

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm
DO NOT ALTER CAD DRAWING BY HAND				date	name	
a	Origin			drawn	23.06.10	Schmidt
rev.	description	date	name	appd.	23.06.10	Koch
				norm		
				d-old		
				scale: 2:1		
				material: see sheet 1		

title:		DIN-A3
P.C.B. HOLE DRILLINGS D-SUB COMBINATION MALE 90° 43W2S with threaded insert and metal bracket		
dwg no:	Inventor 10	sh: 2
13K2A2298		
part no: see sheet 1		